

Grating Selection Guide




Molded and Pultruded Grating

	Fibergrate® Molded Grating		Safe-T-Span® Pultruded Grating
	1" Rectangular Mesh	1", 1-1/2", 2" Square Mesh	
Corrosion Resistance	HR	HR	R
Strength/Stiffness (longest span)	R	R	HR
Impact Resistance	R	HR	A
Open Area (for drainage, aeration, light penetration)	HR	HR	A
Single-Direction Span	R	A	HR
Bi-Direction Span	NR	HR	NR
Ease of Layout and Installation	A	HR	A
Lightweight in Comparison to Metals	HR	HR	HR
Custom Panel Sizes Available	A	R	R

HR = Highly Recommended **R** = Recommended **A** = Acceptable **NR** = Not Recommended

These are general comparisons. A Fibergrate representative should be consulted for an exact match of grating and application.

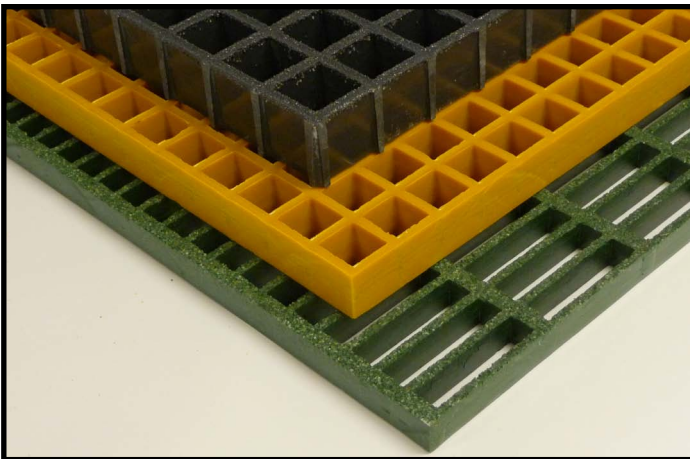

Molded Grating



Pultruded Grating



5151 Beltline Rd. Ste 700 Dallas, Texas 75254
 Phone: 972-250-1633 Fax: 972-250-1530



www.fibergrate.com



info@fibergrate.com

